
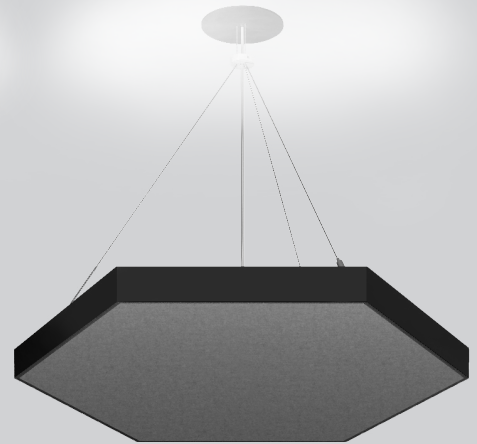


HEXO EVO

ACOUSTIC INDIRECT

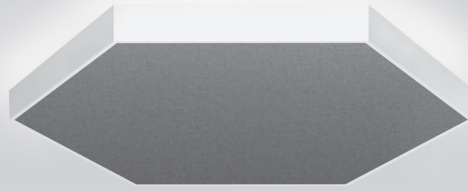

Features

Seamlessly welded fixture housing		
made of aluminum		
Powder coated white, gray or black		
Up to 125lm/W		
27K, 30K, 35K, 40K		
CRI > 80 or CRI > 90		
Passive cooling		
30K	L70	50,000h
35K / 40K	L91	50,000h
Opal lay-in cover for uniform illumination		

Physical attributes



Electrical attributes



Dimensional attributes



Physical attributes

A RANGE

HEXO EVO H E X O - A / I

B SUB CATEGORY

lay-in acoustic L I

C MOUNTING

surface mount S U R
pendant P D T

D COLOR HOUSING

white W H
black B L
gray G R

E COLOR ACOUSTIC

white W H
light gray L G
anthracite gray G R

F CCT

3000K 3 0 K
3500K 3 5 K
4000K 4 0 K

G CRI

CRI > 80 C 8 0
CRI > 90 C 9 0

Electrical attributes

H VOLTAGE

Universal 120 / 277 U N V
347V (only 0-10V dim) 3 4 7

I DIMMING

0-10V 1% 0 1 0 V
DALI D A L I
Lutron EcoSystem L E S 1
Quantum, Vive, GRAFIKEye,
HomeWorks

J OUTPUT LM

○ 1½'	790lm	0 2 9 0 0 L
	1090lm	0 4 1 0 0 L
○ 2'	960lm	0 4 0 0 0 L
	1310lm	0 5 4 0 0 L
	1330lm*	0 6 5 0 0 L
○ 3'	1780lm	0 6 8 0 0 L
	1780lm	0 7 8 0 0 L
	2080lm	1 0 1 0 0 L
	2910lm	1 3 8 0 0 L

item code matches with coordinating HEXO EVO Direct/Indirect fixture

*only 0-10V and DALI dimming available

K CIRCUIT / EM

single circuit
*leave blank

Dimensional attributes

L DIAMETER IN FT

○ 1½'	DM - 1 . 5 F T
○ 2'	DM - 2 F T
○ 3'	DM - 3 F T

Technical data



SIZE TYPE	LED COLOR TEMPERATURE	LIGHT DISTRIBUTION	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
○ 1½' gray	30K, 35K	100% up	780lm	86%	102lm/W
	40K		810lm		107lm/W
	30K, 35K	100% up	1090lm		87lm/W
	40K		1130lm		91lm/W
○ 2' gray	30K, 35K	100% up	960lm	86%	114lm/W
	40K		1000lm		118lm/W
	30K, 35K	100% up	1310lm		107lm/W
	40K		1360lm		111lm/W
	30K, 35K	100% up	1330lm		100lm/W
○ 3' gray	40K		1380lm	104lm/W	
	30K, 35K	100% up	1780lm	86%	119lm/W
	40K		1850lm		124lm/W
	30K, 35K	100% up	1780lm		117lm/W
	40K		1850lm		121lm/W
	30K, 35K	100% up	2080lm		111lm/W
	40K		2170lm		115lm/W
	30K, 35K	100% up	2800lm		102lm/W
	40K		2910lm		106lm/W

Accessory



SUSPENSION SET < 36 INCH

3-piece barrel mount set 6 9 8 - 0 9 8 - 0 5 1 4 0



HEXO EVO 1½'
surface

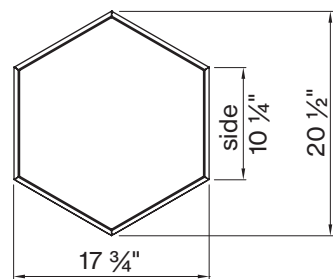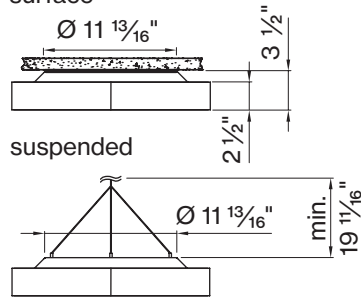

HEXO EVO 2'
surface

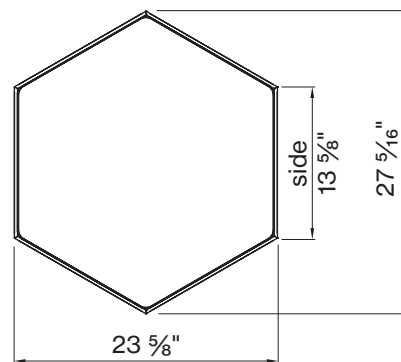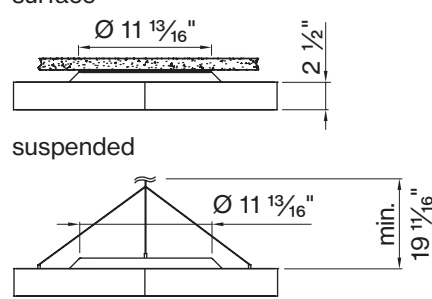

HEXO EVO 3'
surface

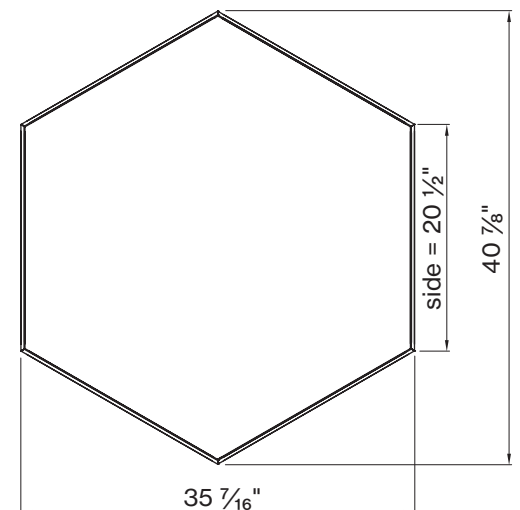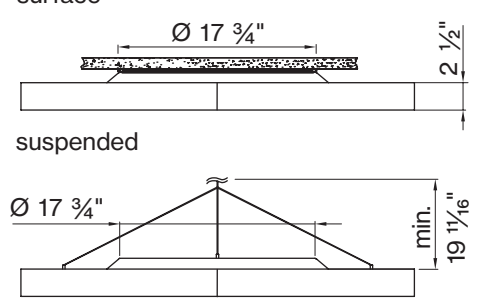

FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
○ 1½'	○ 17 3/4" / h 2 1/2"	DM - 1 . 5 F T
○ 2'	○ 23 5/8" / h 2 1/2"	DM - 2 F T
○ 3'	○ 35 7/16" / h 2 1/2"	DM - 3 F T