





# BASO 1.5 WALL WASH

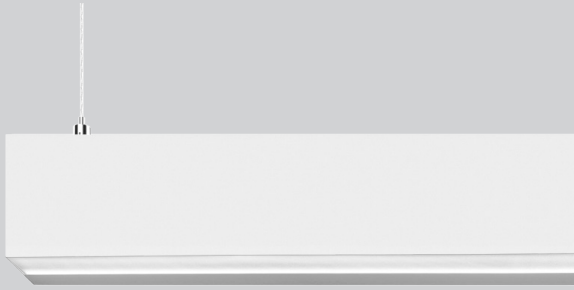

## PERFORMANCE

- Up to 103lm/W efficiency
- 400 / 600 / 800lm/ft
- CRI > 80 & CRI > 90
- Damp rated



## MOUNTING

Ceiling




Suspended



## BEAM DISTRIBUTION

### Wall to ceiling ratio

Room height	H = 9 ft
Distance to wall	A = 3 ft
Reflection factor	0.7   0.5   0.2
Maintenance factor	0.8
Eye level	4 - 5 ft

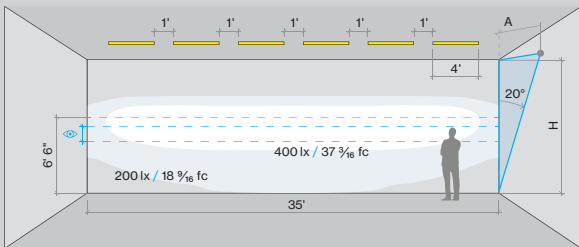

## 10 Business Days for all QuickShip items

- Maximum quantity: 400'
- "QuickShip" must be clearly listed on PO.
- QuickShip items must be on Separate Purchase Order.
- QuickShip orders must be received with complete and correct catalog numbers.
- Variant request will not qualify for QuickShip program.
- QuickShip orders must be received before 2 pm EST. After 2 pm, shipping will be based on the next business day.
- QuickShip orders are based on standard XAL terms for payment.
- Order change of any type will affect shipping times.
- Partial shipments may be required based on current factory inventory.

Declare.

CCEA  
Chicago  
plenium

RoHS  
compliant

c UL US

5 YEAR  
limited  
led warranty

## Catalog Number Example

BASO1.5-SUR-WH-WW-30K-C80-UNV-010V-0400LF-ST-72IN

## A RANGE

QS BASO 1.5 BASO1.5

## B MOUNTING

QS Surface SUR  
QS Pendant PDT

## C COLOR

QS White WH  
QS Black BL

## D LENS

QS Asymmetric wall washer WW

## E CCT

QS 3000K 30K  
QS 3500K 35K

## F CRI

QS CRI > 80 C80  
QS CRI > 90 C90

## G VOLTAGE

QS 120V / 277V UNV

## H DIMMING

QS 0-10V 1% 010V

## I OUTPUT LM/FT

QS 400lm/ft 100% 0400LF  
QS 600lm/ft 100% 0600LF  
QS 800lm/ft 100% 0800LF

## J CIRCUIT / EM

QS Single circuit \*

## K SHAPE / PATTERN

QS Linear / straight ST  
QS Linear / straight + flex inset SF  
includes 1ft. field-cutable section; only available for 4' and 8' segments

## L DIMENSIONS IN INCH

QS Linear 4' 48IN  
QS Linear 6' 72IN  
QS Linear 8' 96IN  
QS Custom length XXFT  
(QS in 2' increments only)


**Technical data**

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>BASO DIRECT</b>									
e LED	4' linear	30 K, 35 K	16 W	1600 lm	100 % down	400lm/ft	-	67 %	103lm/W
	6' linear		24 W	2400 lm					
	8' linear		32 W	3200 lm					
e <sup>2</sup> LED	4' linear	30 K, 35 K	24 W	2400 lm	100 % down	600lm/ft	-	67 %	99lm/W
	6' linear		32 W	3200 lm					
	8' linear		48 W	4800 lm					
e <sup>2+</sup> LED	4' linear	30 K, 35 K	36 W	3200 lm	100 % down	800lm/ft	-	67 %	93lm/W
	6' linear		48 W	4000 lm					
	8' linear		72 W	6400 lm					

**Patterns** top view

**LINEAR**



A	FIXTURES	CODE
48"	1'x 4' linear	ST - 0 4 FT
96"	1'x 8' linear	ST - 0 8 FT
144"	8'+ 4' linear	ST - 1 2 FT





DIMENSIONS

**BASO 1.5 WALL WASHER**

CEILING direct

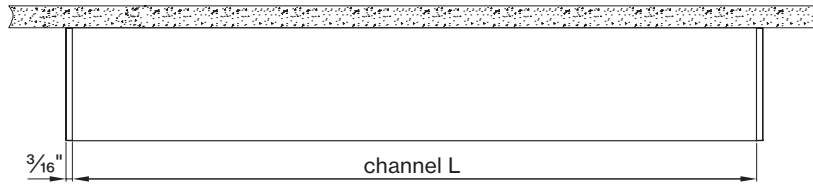

PENDANT direct

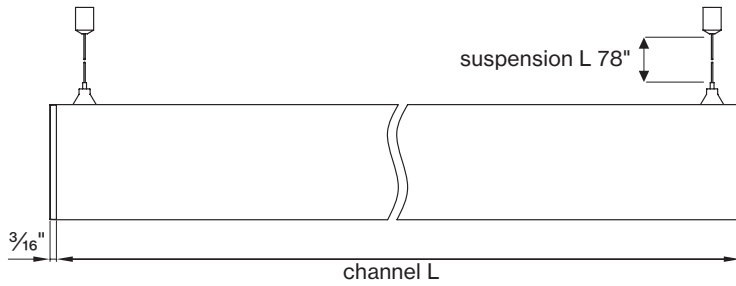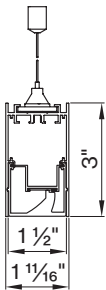

**BASO mounting instructions**

Get access to the BASO 1.5 WW mounting instructions faster by scanning the QR code.

[www.xalusa.com/resources/mounting-instructions/baso](http://www.xalusa.com/resources/mounting-instructions/baso)

