



Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT / INDIRECT									
e LED 	4' linear	35K	15.2W	1650lm	40% down / 60% up	157lm/ft	253lm/ft	70%	108lm/W
	6' linear		22.8W	2475lm					
	8' linear		30.5W	3300lm					
e ² LED 	4' linear	35K	20.2W	2230lm	40% down / 60% up	215lm/ft	343lm/ft	70%	110lm/W
	6' linear	35K	30.3W	3345lm					
	8' linear	30K, 35K	40.4W	4470lm					

Patterns top view

LINEAR


A	FIXTURES	CODE
48"	1× 4' linear	ST - 0 4 FT
96"	1× 8' linear	ST - 0 8 FT
144"	8' + 4' linear	ST - 1 2 FT




DIMENSIONS

BASO 1.5


PENDANT
direct

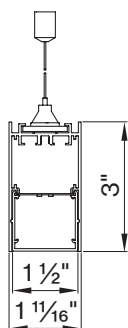

direct / indirect



linear 4ft

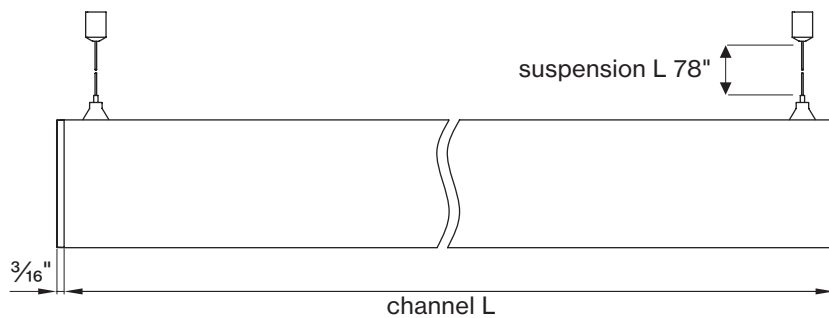

BASO mounting instructions

Get access to the BASO 1.5 mounting instructions faster by scanning the QR code.

www.xalusa.com/resources/mounting-instructions/baso

