

Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT									
e LED	4' linear	35K	12.8W	1600lm	100% down	400lm/ft	-	75%	125lm/W
	6' linear		19.2W	2400lm					
	8' linear		25.6W	3200lm					
e ² LED	4' linear	35K	20.4W	2400lm	100% down	600lm/ft	-	75%	117lm/W
	6' linear		30.6W	3600lm					
	8' linear		40.8W	4800lm					
e ²⁺ LED	4' linear	35K	28W	3200lm	100% down	800lm/ft	-	75%	114lm/W
	6' linear		42W	4800lm					
	8' linear		56W	6400lm					

Patterns top view


LINEAR

A	FIXTURES	CODE
48"	1' x 4' linear	ST - 0 4 FT
96"	1' x 8' linear	ST - 0 8 FT
144"	8' + 4' linear	ST - 1 2 FT




Dimensions



SURFACE direct



direct

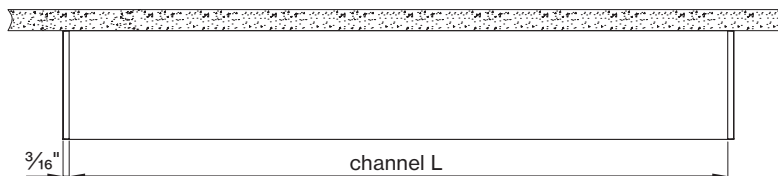

PENDANT

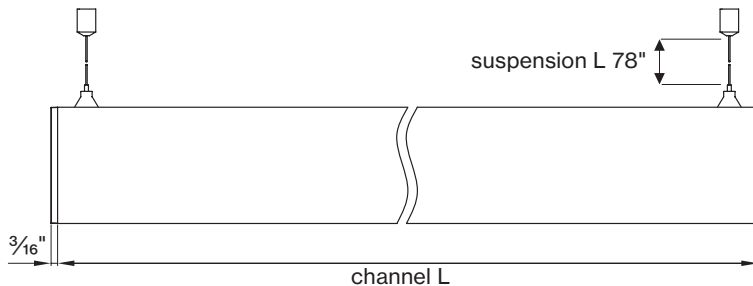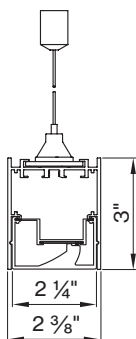

BASO mounting instructions

Get access to the BASO 2.5 WW mounting instructions faster by scanning the QR code.

www.xalusa.com/resources/mounting-instructions/baso

