


BASO 4.0

DIRECT/INDIRECT




PERFORMANCE

- Up to 117lm/W efficiency
- 500 / 955lm/ft
- CRI > 80 & CRI > 90
- Damp rated




MOUNTING

Wall



Pendant



10 Business Days for all QuickShip items

- Maximum quantity: 400'
- "QuickShip" must be clearly listed on PO.
- QuickShip items must be on Separate Purchase Order.
- QuickShip orders must be received with complete and correct catalog numbers.
- Variant request will not qualify for QuickShip program.
- QuickShip orders must be received before 2 pm EST. After 2 pm, shipping will be based on the next business day.
- QuickShip orders are based on standard XAL terms for payment.
- Order change of any type will affect shipping times.
- Partial shipments may be required based on current factory inventory.

Declare.

CCEA
Chicago
plenum

RoHS
compliant

c UL US

5 YEAR
limited
led warranty



Catalog Number Example

BASO4.0-PDT-BL-30K-C80-UNV-010V-955LF-ST-96IN

A RANGE

 BASO 4.0 B A S O 4 . 0

H OUTPUT LM/FT

 500lm/ft $\pm 40/\pm 60\%$ 0 5 0 0 L F
 955lm/ft $\pm 40/\pm 60\%$ 0 9 5 5 L F

B MOUNTING

 Pendant P D T

I CIRCUIT / EM

 Single circuit *

C COLOR

 White W H
 Black B L





J SHAPE / PATTERN

 Linear / straight S T

E CCT

 3000K 3 0 K
 3500K 3 5 K

K DIMENSIONS IN INCH

 Linear 4' 4 8 I N
 Linear 6' 7 2 I N
 Linear 8' 9 6 I N
 Custom length XXFT
 (QS in 2' increments only)

E CRI

 CRI > 80 C 8 0
 CRI > 90 C 9 0



F VOLTAGE

 120V / 277V U N V

G DIMMING

 0-10V 1% 0 1 0 V

Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT / INDIRECT									
e LED									
	4' linear	35K	17.5 W	2060 lm	40% down / 60% up	215 lm/ft	300 lm/ft	73%	117 lm/W
	6' linear		26.3 W	2060 lm					
	8' linear		35 W	4120 lm					
	2' + 2' corner		17.5 W	2060 lm					
e² LED									
	4' linear	35K	33.8 W	3850 lm	40% down / 60% up	407 lm/ft	555 lm/ft	73%	113 lm/W
	6' linear		50.7 W	5775 lm					
	8' linear		67.7 W	7690 lm					
	2' + 2' corner		33.8 W	3850 lm					

Patterns top view

LINEAR


A	FIXTURES	CODE
48"	1' x 4' linear	ST - 0 4 FT
96"	1' x 8' linear	ST - 0 8 FT
144"	8' + 4' linear	ST - 1 2 FT




DIMENSIONS

BASO 4.0


PENDANT direct

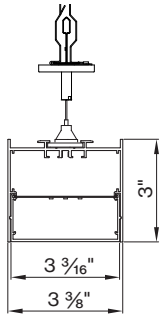

direct / indirect



linear 4ft

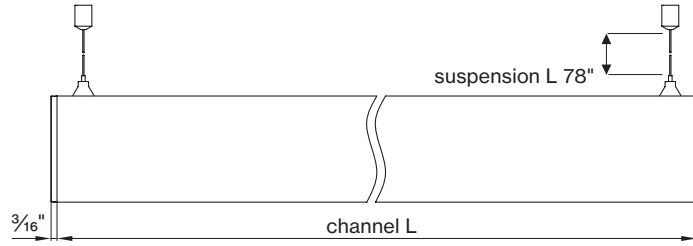

BASO mounting instructions

Get access to the BASO 4.0 mounting instructions faster by scanning the QR code.

www.xalusa.com/resources/mounting-instructions/baso

