





MOVE IT 1.2

DIRECT

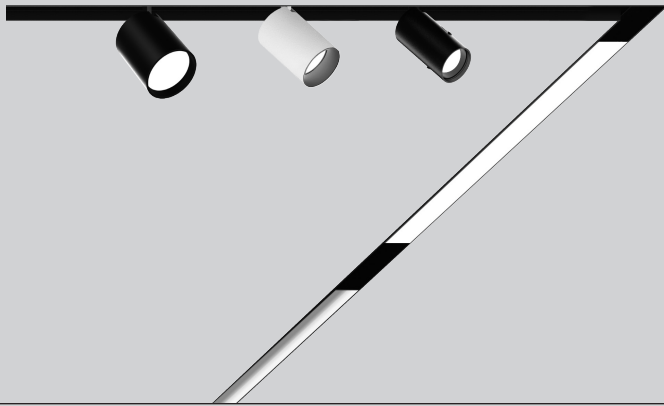


PERFORMANCE

- 48V low voltage track
- Multiple inset options
- CRI > 90+
- Flexible magnetic profile system




MOUNTING

Recessed



MAGNETIC ATTACHMENT

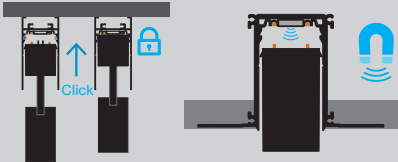

10 Business Days for all QuickShip items

- Maximum quantity: 400'
- "QuickShip" must be clearly listed on PO.
- QuickShip items must be on Separate Purchase Order.
- QuickShip orders must be received with complete and correct catalog numbers.
- Variant request will not qualify for QuickShip program.
- QuickShip orders must be received before 2 pm EST. After 2 pm, shipping will be based on the next business day.
- QuickShip orders are based on standard XAL terms for payment.
- Order change of any type will affect shipping times.
- Partial shipments may be required based on current factory inventory.



5 YEAR
limited
led warranty

Catalog Number Example

MOVE1.2-RTL-BL-48V-010V-ST-04FT

A RANGE

QS MOVE IT 1.2 MOVE 1 . 2

B MOUNTING

QS Recessed trimless RTL

C COLOR

QS Black BL

D VOLTAGE

QS 48 V 48 V
constant voltage track

E DIMMING

QS 0-10V 1% single control 0 1 0 V

F SHAPE / PATTERN

QS Linear ST


G DIMENSIONS IN FEET

QS Linear 4' 04 FT
QS Linear 8' 08 FT
Custom length XX FT
(QS in 2' increments only)



MOVE IT 1.2 channel dimensions


RECESSED



Possible shapes top view


please provide RCP to ensure correct shape orientation

LINEAR




Power feeder locations

POWER FEED

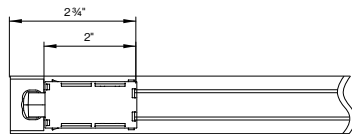

LINEAR POWER COUPLER

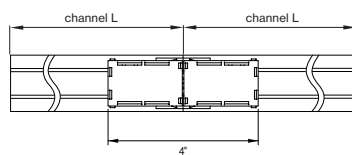

MOVE IT SYSTEM Mounting Instructions

Get access to the MOVE IT SYSTEM mounting instructions faster by scanning the QR code.

<https://www.xalusa.com/resources/mounting-instructions/move-it-system>

