


# ROUND DIRECT/INDIRECT




## PERFORMANCE

- Up to 125 lm/W efficiency
- 27 K, 30 K, 35 K, 40 K
- CRI > 80 & CRI > 90




## MOUNTING

Surface



Pendant




## ONE CLICK INSTALLATION

Mounting & electrical connection with one click



[link to video](#)

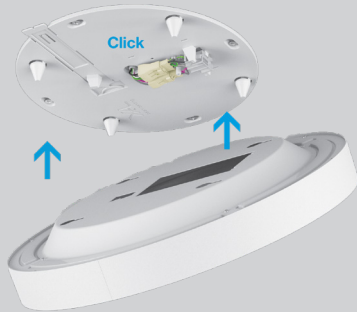

## MAKE YOUR ROOM STAND OUT



## Catalog Number Example

ROUND-D/I-SUR-BL-OP-40K-C80-UNV-010V-04000LF-DM-2FT

### A RANGE

ROUND ROUND - D / I

### B MOUNTING

QS Surface SUR  
QS Pendant PDT

### C COLOR

QS White WH  
Black BL  
Gray GR

### D LENS

Opal cover OP

### E CCT

QS 2700K 2 7 K  
QS 3000K 3 0 K  
3500K 3 5 K  
4000K 4 0 K

### F CRI

QS CRI > 80 C 8 0  
CRI > 90 C 9 0

### G VOLTAGE

QS 120V/277V UNV  
347 V 3 4 7  
only 0-10 V dim

### H DIMMING

QS 0-10V 1% 0 1 0 V  
DALI DALI  
Lutron EcoSystem LES 1  
Quantum, Vive, GRAFIK Eye,  
HomeWorks  
Power over ethernet POEC  
consult customer service for compatibility

### I OUTPUT LM

QS Ø 1 1/2'	2900lm	0 2 9 0 0 L
QS	4100lm	0 4 1 0 0 L
QS Ø 2'	4000lm	0 4 0 0 0 L
QS	5400lm	0 5 4 0 0 L
	6500lm	0 6 5 0 0 L
QS Ø 3'	6800lm	0 6 8 0 0 L
QS	7800lm	0 7 8 0 0 L
	10100lm	1 0 1 0 0 L
	13800lm	1 3 8 0 0 L

### J CIRCUIT / EM

QS Single circuit \*

\* leave blank

EMP EM battery pack	EMB
---------------------	-----


EM battery pack only for 120 / 277 V.  
EM only available for DM 2' ≤ 4000lm  
Lutron EM only available for DM 2' ≤ 4000lm  
Lutron EM only available for DM 2' ≤ 4000lm  
Lutron EM only available for DM 3' ≤ 7800lm

### K DIAMETER IN FT

Ø 1 1/2'	DM - 1 . 5 FT
Ø 2'	DM - 2 FT
Ø 3'	DM - 3 FT

**BASO**  
basolighting.com  
xalusa.com

Technical data


SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT				
 Ø 1 ½' gray	30K, 35K	28W	2870lm	73% down / 27% up	2090lm	780lm	86%	102lm/W	
	40K		2980lm			2180lm	810lm	107lm/W	
	30K, 35K	47W	4070lm	73% down / 27% up	2990lm	1090lm		87lm/W	
	40K		4240lm		3110lm	1130lm		91lm/W	
Ø 2' gray	30K, 35K	35W	4020lm	76% down / 24% up	3060lm	960lm	86%	114lm/W	
	40K		4180lm		3180lm	1000lm		118lm/W	
	30K, 35K	50W	5400lm	76% down / 24% up	4090lm	1310lm		107lm/W	
	40K		5610lm		4250lm	1360lm		111lm/W	
	30K, 35K	64W	6450lm	80% down / 20% up	5110lm	1330lm		100lm/W	
	40K		6710lm		5320lm	1380lm		104lm/W	
Ø 3' gray	30K, 35K	57W	6830lm	74% down / 26% up	5050lm	1780lm	86%	119lm/W	
	40K		7100lm		5250lm	1850lm		124lm/W	
	30K, 35K	67W	7800lm	80% down / 20% up	6020lm	1780lm		117lm/W	
	40K		8110lm		6250lm	1850lm		121lm/W	
	30K, 35K	91W	10130lm	80% down / 20% up	8040lm	2080lm		111lm/W	
	40K		10540lm		8360lm	2170lm		115lm/W	
	30K, 35K	135W	13790lm	80% down / 20% up	10980lm	2800lm		102lm/W	
	40K		14350lm		11420lm	2910lm		106lm/W	

Accessory


SUSPENSION SET < 36 INCH

3-piece barrel mount set 698 - 098 - 05140


ROUND 1 ½' surface

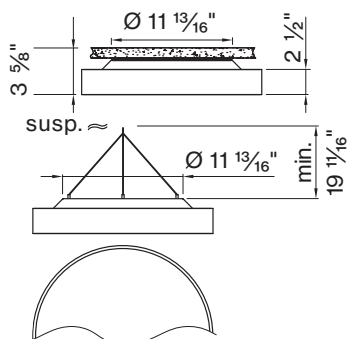

ROUND 2' surface

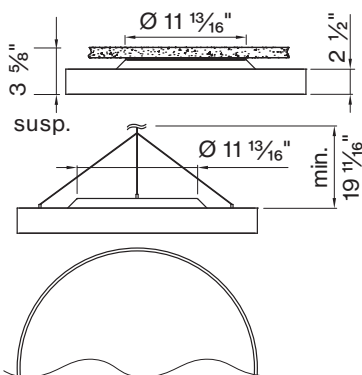

ROUND 3' surface

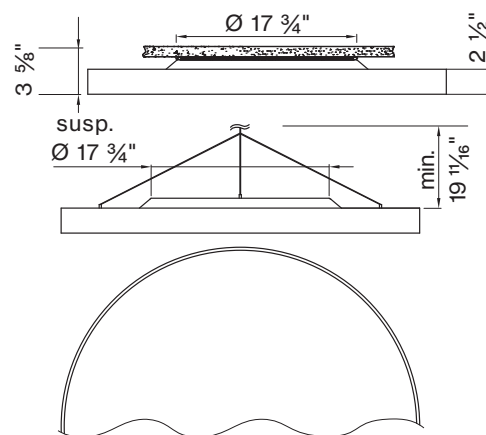

FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
Ø 1 ½'	Ø 11 13/16" / h 3 1/2"	DM-1.5FT
Ø 2'	Ø 23 5/8" / h 3 1/2"	DM-2FT
Ø 3'	Ø 35 7/16" / h 3 1/2"	DM-3FT

ROUND mounting instructions

Get access to the ROUND mounting instructions faster by scanning the QR code.



[www.xalusa.com/resources/mounting-instructions/round](http://www.xalusa.com/resources/mounting-instructions/round)