


CIRCLE 2.5

DIRECT/INDIRECT



PERFORMANCE

- Up to 112lm/W efficiency
- 455 / 750lm/ft
- CRI > 80 & CRI > 90
- Damp rated



MOUNTING

Pendant



WHAT SHAPES YOU?

Combination with BASO 2.5 system components



[link to video](#)



MAKE YOUR ROOM STAND OUT



Catalog Number Example

CIRCLE 2.5-PDT-WH-OPOP-40K-C90-UNV-010V-0455LF-DC-DM-72IN

A RANGE

CIRCLE 2.5 C I R C L E 2 . 5

G VOLTAGE

120V / 277V UNV

B MOUNTING

Pendant P D T

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black power feeds or junction box covers, please contact customer service

H DIMMING

0-10V 1% 0 1 0 V

Power over ethernet POE C
consult customer service for compatibility

I OUTPUT LM/FT

455 lm/ft $\pm 40/\pm 60\%$ 0 4 5 5 L F

750 lm/ft $\pm 40/\pm 60\%$ 0 7 5 0 L F

Custom lm/ft X X X X L F

C COLOR

White W H

Black B L

Gray G R

Custom color RAL X X

recessed version available in white only

J CIRCUIT / EM

Single circuit S C

Dual circuit D C

EMC or EMP not available

D LENS

OPOP opal cover direct O P O P

opal cover indirect

K DIAMETER IN INCH

Ø36" DM - 3 6 I N

Ø48" DM - 4 8 I N

Ø60" DM - 6 0 I N

Ø72" DM - 7 2 I N

Ø96" DM - 9 6 I N

Ø120" DM - 1 2 0 I N

Ø240" DM - 2 4 0 I N

E CCT

3000K 3 0 K

3500K 3 5 K

4000K 4 0 K

Custom CCT X X K

F CRI

CRI > 80 C 8 0

CRI > 90 C 9 0

L CERTIFICATION (optional)

Chicago Plenum C C E A

Technical data

DIRECT / INDIRECT



	DIAMETER SIZE	LED	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUT.	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	POWER CONSUMPT.	LUMINAIRE EFFICACY
	D 36"	e LED e ² LED	40K	77.3W 126.1W	8578lm 14118lm	± 40% / ± 60%	3431lm 5647lm	5147lm 8471lm	74%	4.1 W/ft 6.7 W/ft	111lm/W 112lm/W
	D 48"	e LED e ² LED		103W 168.1W	11438lm 18824lm		4575lm 7530lm	6863lm 11295lm		4.1W/ft 6.7 W/ft	111lm/W 112lm/W
	D 60"	e LED e ² LED		128.8W 96.6W	14297lm 23531lm		5719lm 9412lm	8578lm 14118lm		4.1W/ft 6.7 W/ft	111lm/W 112lm/W
	D 72"	e LED e ² LED		154.6W 252.1W	17157lm 28237lm		6863lm 11295lm	10294lm 16942lm		4.1W/ft 6.7 W/ft	111lm/W 112lm/W
	D 96"	e LED e ² LED		206.1W 336.2W	22876lm 37649lm		9150lm 15060lm	13725lm 22589lm		4.1W/ft 6.7 W/ft	111lm/W 112lm/W
	D 120"	e LED e ² LED		257.6W 420.2W	28595lm 47061lm		11438lm 18824lm	17157lm 28237lm		4.1W/ft 6.7 W/ft	111lm/W 112lm/W
	D 240"	e LED e ² LED		515.2W 840W	57190lm 94298lm		22876lm 37719lm	34314lm 56578lm		4.1W/ft 6.7 W/ft	111lm/W 112lm/W



for 30 K or 35 K multiply lm value by 0.96

DIMENSIONS

FULL CIRCLE DIMENSIONS

NOMINAL	ON-CENTER RADIUS	ON-CENTER DIAMETER	OUTSIDE DIAMETER	OUTSIDE CIRCUMFER.
Ø 36"	18"	Ø 36"	Ø 38 3/8"	120 9/16"
Ø 48"	24"	Ø 48"	Ø 50 3/8"	158 1/4"
Ø 60"	30"	Ø 60"	Ø 62 3/8"	196"
Ø 72"	36"	Ø 72"	Ø 74 3/8"	233 5/8"
Ø 96"	48"	Ø 96"	Ø 92 3/8"	306"
Ø 120"	60"	Ø 120"	Ø 122 3/8"	384 7/16"
Ø 240"	120"	Ø 240"	Ø 242 3/8"	761 7/16"

PENDANT

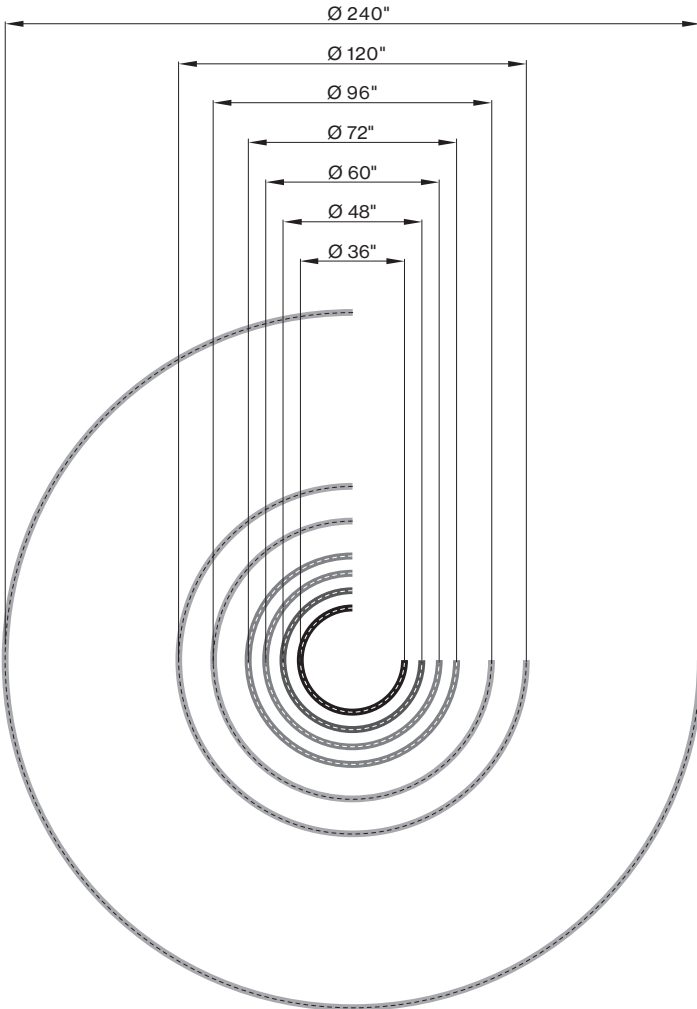

Declare.

CURVE/CIRCLE 1.5 2.5 4.0
XAL USA

Final Assembly: Oxford, Connecticut, USA
 Life Expectancy: 5 Year(s)
 End of Life Options: Recyclable (70%), Landfill (30%)

Ingredients:
 Aluminum; Copper chloride (CuCl₂); 2-Propenoic acid, 2-methyl-, methyl ester, polymer with ethyl 2-propenoate; Steel manufacture, chemicals; Polyvinyl chloride; Nickel (Metallic); Brass; Silicon; Poly[umino(1,6-dioxo-1,6-hexanediy)imino-1,6-hexanediy]; Acetic acid ethenyl ester, polymer with ethane; Copper; Polypropylene; Magnesium hydroxide; Unnamed Substance¹; Tin, Organic; Zinc

¹LBC Temp Exception RL-002 - Small Electrical Components

Living Building Challenge Criteria:

I-13 Red List:
 LBC Red List Free % Disclosed: 100% at 100ppm
 LBC Red List Approved VOC Content: Not Applicable
 Declared

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable

XAL-0001
 EXP. 01 APR 2024
 Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
 INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

SHAPES mounting instructions

Get access to the SHAPES circle mounting instructions faster by scanning the QR code.



www.xalusa.com/resources/mounting-instructions/shapes